Air King Ventilation Products®

SPECIFICATIONS

AK110LS

EXHAUST FANS

110 CFM/1.5 SONES @ 0.10" wg. • 90 CFM/1.5 SONES @ 0.25 wg.
HVI CERTIFIED 120 Volts, 0.30 amps, 60 hz.

- **Grill**
  White, polymeric grill secured in place with torsion springs; easily removed if necessary, dimensions - 11" x 13 3/4".
- **Blower Wheel**
  Balanced polymeric dual inlet blower wheel 5 13/32" dia. x 4" depth, 30 paddles, secured in place using 8M hex nut.
- **Motor**
  Enclosed 4 pole electronically balanced permanently split capacitor motor (PSC); life time lubrication, suitable for continuous operation. Motor bearings - ball. Rated 115/120 volts, 60 Hz, 0.30 amps.
- **Fan Housing**
  23 gauge galvanized steel housing, fully sealed. Overall dimensions 10 7/8" x 9 3/8" x 7 7/8".
- **Duct Collar**
  4" round, zinc plated metal collar adapter. 4" spring loaded aluminum backdraft damper.
- **Ventilating Area**
  For bathrooms up to 110 sq. ft. For other rooms up to 135 sq. ft.
- **Electrical Connections**
  1/2" electrical knockouts provided. Easy wiring access via either internal or external wiring compartment cover.

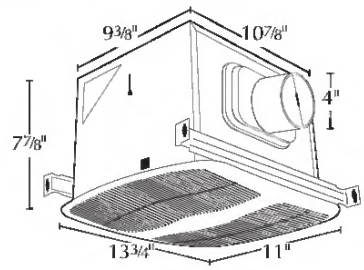

CUL/HVI

Acceptable for use over tub or shower when installed in a GFCI protected branch circuit.

- **Unit Mounting**
  The housing will mount in ceilings with at least 8" of clearance and through drywall thickness up to 3/4", with a rough-in opening of 11 1/8" x 9 5/8". Rated for ceilings insulated to R-40. The housing will mount either between 16" or 24" on center joists, using the 4 supplied housing mounting rails. The housing mounting rails can be adapted for overhead mounting (hardware not provided).
- **Single Pack Shipping Info**
  Box Dim: 14 1/8" x 11 5/8" x 9 5/8"
  UPC: 0-8316221121-7
  Shipping Weight: 11.5 lbs.

PERFORMANCE

	Static Pressure (inches of w.g.)								*HVI Sones @ .1 SP*	*Fan Speed RPM*	*Power Watts*
	0	0.05	0.1	0.2	0.25	0.3	0.35	0.4			
Air Flow - CFM	119	115	110	99	90	75	65	48	1.5	1125	28

PROJECT		ARCHITECT	
LOCATION		ENGINEER	
CONTRACTOR		SUBMITTED BY	DATE

FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS

c UL us

2100 HVI CERTIFIED™

ENERGY STAR

U.S.: 820 Lincoln Drive
West Chester, Pennsylvania 19380-4466
Tel: (877)-304-3785
Fax: (610) 696-8048

Canada: 110 Glidden Road
Brampton, Ontario L6T 2J3
Tel: (905) 456-2033
Fax: (905) 456-1015

Downloaded from www.Manualslib.com manuals search engine